

Professional care and maintenance brochure



Reynaers
Aluminium

Windows.
Doors.
Curtain Walls.

Together for better

www.reynaers.co.uk




General instructions for cleaning

Regular cleaning and maintenance of your window and door elements is of great importance to assure their correct functioning and extended lifetime. The aluminium construction needs regular maintenance, using non-aggressive cleansing agents, like tepid water with a non-aggressive, pH-neutral (6-8), non-acetose detergent, not containing ammonia.

Hardware parts of the Reynaers Aluminium system should only be replaced by the original parts.

THE BELOW MATERIALS CAN NOT BE USED TO CLEAN YOUR WINDOWS AND DOORS:

- Hard materials such as knives, steel wool, metal scrapers, sandpaper, etc. These will damage the surface of your window and door elements.
- Aggressive or corrosive cleaning agents should be avoided as they can inflict irreversible damage to the surface treatment of your window and door elements. Instead, use our dedicated range of Reynaers Aluminium care products. An overview of our care products can be found on page 10.

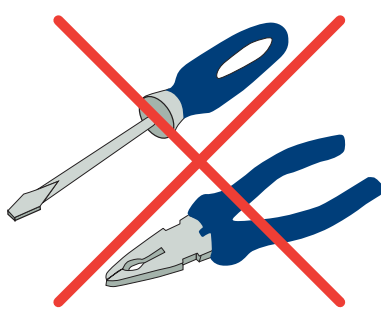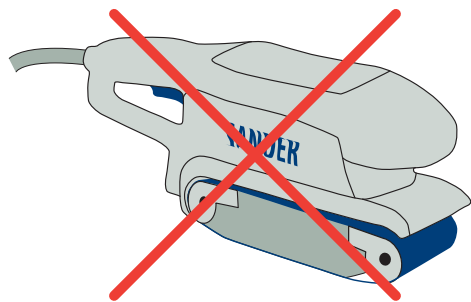

Maintenance interval

The maintenance interval between check-ups depends on a variety of factors, see chart below:

Opening type	Use	Frequency
Doors	Limited use	Once every 6 months
	Normal use	
	Intensive use (schools, hospitals, public buildings,...)	Once every 3 months
	Panic doors (EN 179/EN1125)	Once every month
Windows / Sliding systems		Once every 6 months

Any possible irregularities in the operation (slowness, unusual sounds, ...) which might occur during maintenance must be reported immediately. Windows and sliding doors should undergo regular maintenance to prolong their service life and to ensure their functionality.

Frequency of maintenance for profiles and hardware in **non-corrosive atmospheres** and provided that the aluminium constructions are exposed to rain: a minimum of twice a year.

Some **corrosive atmospheres** or other risk factors may however require even more frequent cleaning to be observed by the end-user.

Non-exhaustive list of examples of such corrosive atmospheres/risk factors:

- Near the coast (<10km) or close to an estuary or large rivers (<5km).
- Above water (condensation).
- Industrial areas, or areas with large amounts of emissions.
- Exposure to large amounts of traffic (motorways, railways, airports).
- Very aggressive atmospheres (e.g. swimming pools, water treatment industry, laboratories, pollution by animals etc.).

WARNING!

Special maintenance is required in case of fireproof doors. For detailed guidelines, please refer to the specific system catalogues of Reynaers Aluminium.

Overall maintenance

Maintenance of drainage slots

Clean the area between the moving and the fixed part every 6 months. If necessary, clear the drainage slots of any blockages.

Maintenance of rails in sliding and lift and slide elements

Dirt and sand might collect in the bottom profile of your sliding/folding door. Clean the gutter(s) every month. If necessary, clear the drainage holes of any blockages. Remove the dirt, dust, grease and graphite annually from the rail with a cloth.

Maintenance of gaskets

Yearly check the gaskets for damage and shrinkage. Apply Reynaers Aluminium Lubricant if required.



Maintenance of hardware and accessories

Clean hardware exclusively with a soft cloth and mild, pH-neutral cleaning materials in diluted form. Remove the dust, grease and graphite annually* from the following areas.

- Window gearing
- Friction hinges
- Moving parts of the handles
- Locks and cylinders
- The opening restrictor of the sliding element

* The frequency depends on opening type and environment, please check specifications on page 3.

WARNING!

- **Avoid liquid lubricants**, rather use a dry clean cloth to wipe the surface and prevent dust collection on the hardware parts.
- Never use aggressive acidic cleaning materials or scouring agents. These can cause damage to the hardware.

Maintenance of electrical components

The maintenance of motorised sliding systems must take place on a yearly basis, preferably before the winter season. For guidance, please reach out to Reynaers' Technical services.

WARNING!

- Maintenance and repair of the motor and /or lock may only be carried out by qualified staff.
- Motorised sliding windows must never be used as escape routes. There must always be another way of leaving the room. Motorised elements must not be used as fire escapes.
- Make sure children do not play with the control button and/or cannot access the remote control.
- The motor must be able to be disconnected from the power supply for maintenance or repair work.
- Make sure water doesn't enter areas with electrical components.



Cleaning and maintenance of windows

The following maintenance operations must be carried out on a regular basis, see chart on page 3:

- 1 Clean the mechanism and remove any traces of dirt. Use a soft cloth and mild, pH-neutral cleaning materials in diluted form.
- 2 Check all the components that are important for safety (hinges, extension arms). In particular, the hinges should be checked for damage and/or deformation due to violent impact.
- 3 Lubricate the moving parts and closure points as indicated in the diagram (use neutral lubricants). If necessary, carry out adjustments to the mechanism and replace worn-out components to restore the correct functioning of the sash. This operation must be carried out by qualified service personnel.



- A Locking point
- B Hinges

Cleaning and maintenance of doors

Single & double doors



DOOR LOCKS

Safety-relevant hardware should be checked at least annually* for wear and tear and a continuous firm fit. Depending on the requirements, fixing screws have to be tightened. The damaged or worn parts should be exchanged with original parts by an authorized specialist.

All movable parts and locking parts have to be lubricated** and their working order should be checked.



DOOR HINGES

In general, hinges are maintenance free and don't need to be lubricated, however you can lubricate them if required.

* The frequency depends on opening type and environment, please check specifications on page 3.

**Please refer to the care products listed on Page 10.

DOOR CLOSERS

Safety elements of door closers must be checked for wear regularly to ensure that they are fitted correctly and securely. Fixing screws must be tightened and any damaged components must be changed. The frequency depends on opening type and environment.



Furthermore, the following maintenance work must be performed at least once a year (depending on the type of hinged leaf doors and their applications).

- All moving parts on the link arm must be free of dirt / debris.
- The closer settings (e.g. closing speed) must be checked.
- Smooth operation of the door must be checked.
- In the case of door closers with special functions (hold-open devices / hold-open systems), they must perform in line with site requirements.
- Door closers and / or defective parts must be replaced immediately if their proper function is no longer guaranteed.

Sliding Door

SLIDING ELEMENT

All safety aspects of the gear, more specifically the fixings (lock, lock keeps, hook keeps and door handles), should be checked regularly. All gear adjustments, especially of the keeps and roller assemblies, the replacement of parts and installation and removing of the sashes should be executed by a window expert. Maintenance should be carried out at suitable intervals (see page 3) relative to the amount of use and environmental conditions.

Follow these instructions:

- Check the operation of the components.
- Any dust and dirt must be removed from the components as this could affect the smooth operation of the system.
- Clean the mechanism and remove any traces of dirt. Use a soft cloth and mild, pH-neutral cleaning materials in diluted form.
- After cleaning the hardware surface, treat it with appropriate care products (see page 10).



LIFT & SLIDE ELEMENT

To ensure the smooth and trouble free operation, you must carry out the following maintenance instructions at least once a year:

- Lubricate all locking parts, using appropriate lubricants.
- After cleaning the hardware surface, treat it with appropriate care products.

WARNING!

The following work should only be performed by an authorized specialist:

- The replacement of fittings.
- The assembly / dismantling of sashes.

Please refer to your local installer for the part numbers below.

Care products

To ensure a lifelong and optimal functioning of your window and door elements, Reynaers provides a complete range of care products for aluminium profiles. Here is an overview of our care product range with a brief product description. Remember to carefully read the instructions on the product labels.

Clean & Care Wax

Shampoo for windows, doors and glass

Purpose
Ideal for maintaining the colour and quality of the lacquer preserve.

Frequency
Two times a year: in a rural environment.
Four times a year: in an 'aggressive' environment such as urban areas, coastal areas, or those near railways.

Instructions
Spray the surface with water abundantly to remove any sand or loose dirt. Pour 60 to 80ml of Clean & Care Wax into a bucket of lukewarm water and polish from bottom to top. Rinse with clean water and dry off with a chamois leather cloth. For an extra glossy result, you can polish afterwards with a dry cloth.

086.9234



Reynawash Ano

Cream cleaner for anodised aluminium surfaces

Purpose
Adds a new gloss to older profiles.

Frequency
Two times a year: in a rural environment.
Four times a year: in an 'aggressive' environment such as urban areas, coastal areas, or those near railways.

Instructions
Spray the surface with water abundantly to remove any sand or loose dirt. Apply the Reynawash Ano cleaner on a lint-free, slightly damp cloth. Clean the surface by wiping vertically. Avoid rubbing in circles while cleaning. When you are done, wipe again with a wet cloth.

086.9213




Sponge & wipe

Sponge and microfibre cloth with unique quality

Purpose
Aids in removing stains on powder coated and anodised profiles and can be reused several times.

Frequency
During every cleaning session.

086.9236



ReynaStick

Stick for touch-ups

Purpose
Ideal for repairing damage to the powder coat of your profiles.

Frequency
As needed.

Instructions
Tap the area where you need a touch-up with the stick. Allow it to dry.

086.9600

Reynaers Aluminium Lubricant

Fine silicone spray for lubricating of hinges and rails

Purpose
Dry lubrication of locks, hinges, turn-and-tilt and sliding systems, rails and brush seals. Water-repellent protection and flawless feeding of porous materials.

Frequency
Once per year, or as required.

Instructions
Apply from a 30cm distance on clean parts only.

086.9233.00



Reynaers Deep Clean

Cleaner for organic contamination

Purpose
Reynaers Aluminium Deep Clean removes organic dirt such as insects, grease, grime or light resins in an instant. This product is suitable for cleaning large surface areas.

Frequency
First-time cleaning or after an extended period without cleaning.

Instructions
Spray the surface with Deep Clean and let it soak in - the duration depends on the level of contamination. Then wipe everything with a clean cloth, no need for rinsing.

086.9238



Reynaers Aluminium Renewer

Cleaner and renewer for restoration of the surface treatment

Purpose
Restores the original intensity of the surface treatment. Protects immediately against UV weathering and nourishes the powder coated and anodised surfaces of profiles.

Frequency
Once or twice a year.

Instructions
Apply the renewer with a soft, clean and dry sponge. Remove excess product with a clean, soft cloth.

086.9235.00



Reyna Multi Foam

Cleaner for organic contamination

Purpose
Removes organic dirt such as insects, grease, grime or light resins in an instant. Suitable for cleaning large surface areas, when cleaning for the first time, or after an extended period without cleaning.

Frequency
First-time cleaning or after an extended period without cleaning.

Instructions
Spray the surface with Reyna Multi Foam and let it soak in - the duration depends on the level of contamination. Then wipe everything with a clean cloth.

086.9230



Reynaers Safety Clean

Degreaser for during production

Purpose
Removes inorganic contamination such as glue residue, sealant, resin, oil, grease, wax, tar, etc.

Frequency
As needed.

Instructions
Apply with a soft cloth.

086.9231.00

ABOUT REYNAERS ALUMINIUM

“Our goal is to increase the value of buildings and to enhance the living and working environment of people worldwide.”

As a part of the Reynaers Group, Reynaers Aluminium is a leading specialist in the development, distribution and commercialization of innovative and sustainable aluminium architectural solutions. These include a wide variety of window and door systems, curtain walls, sliding systems, and conservatories. Besides the extensive range of standard solutions, we also develop customized solutions, tailored to the individual customer or project.

Reynaers Aluminium was founded in 1965 and currently employs over 2,600 people in over 40 countries worldwide, exporting to more than 70 countries on 5 continents. Reynaers Group achieved an annual turnover of 756 million euros in 2022.

The company's success is strengthened by our close partnership with 5,000 partner fabricators, architects, and project developers worldwide. This unique cooperation reflects in our motto: Together for better.

At the Reynaers Campus, we focus on sharing knowledge and experience with architects, fabricators, contractors and other building partners while inspiring with new technologies. Next to the Technology, Training and Automation Centre, the Reynaers Campus also has its own Experience Centre where future buildings can be explored in our virtual reality room Avalon.

Reynaers UK has an Knowledge Centre based in Birmingham that offers in-house training for our customers.

For more information: www.reynaers.co.uk



**Reynaers
Aluminium**

111 Hollymoor Way,
Northfield, Birmingham
B31 5HE

T +44 (0) 121 421 1999
reynaersltd@reynaers.com

www.reynaers.co.uk